

WHEEL WEIGHTS


SO EASY

SO EASY, patent pending



- » Casted weights
- » Shipped on a rack to use for vertical storage of weights
- » Easy for handling thanks to forklift cutouts
- » Weight units can be used on several tractors

Cutouts
+ Vertical storage
= Easy to handle

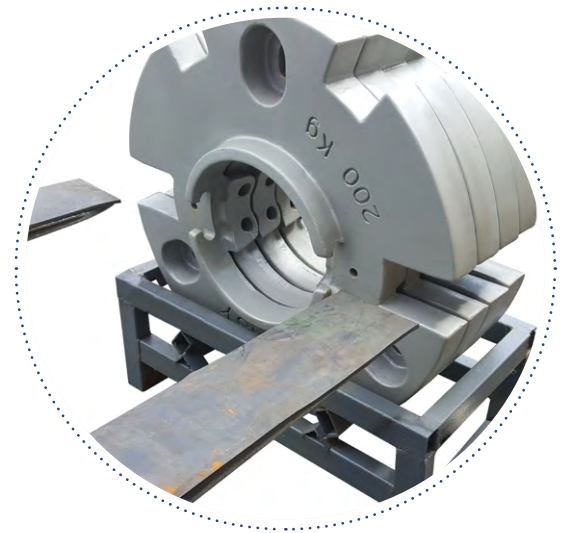



Install and removal of weights in less than 5 minutes per side

1

- » Install weight receiver on the wheel flange (8 or 10 point axles)



2

- » Lift weights by inserting forks in cutouts and bring them to the weight receiver



3

- » Retain them on the weights receiver by inserting loose pins. Repeat process if more than one weight section is to be installed.



4

- » Rod connecting to the retainer clamp.



5

- » Weights are kept in place with a clamp which holds the weights with one torqued bolt (loose pins removed)

